


Orbit

Journal of the Radio Amateur Space Program

No. 10

March/April 1982
\$2.00 U.S.A./Canada

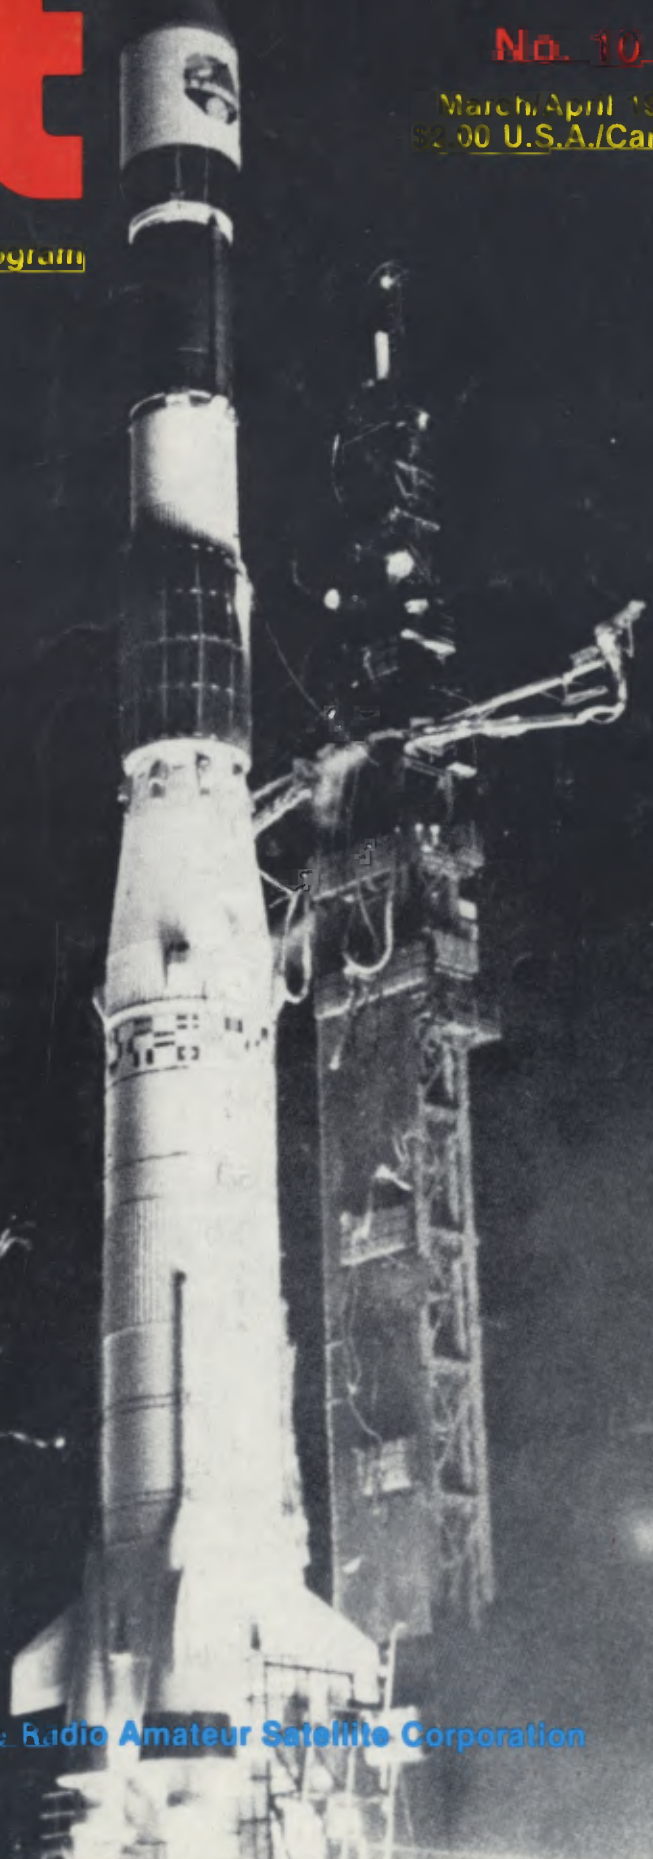

Published by AMSAT — The Radio Amateur Satellite Corporation

OSCAR AND IC-451A (The Perfect Couple)

ICOM presents a multifunction multimode base station transceiver for use either as part of an OSCAR satellite link on mode B or J, or for use with your favorite 440MHz FM repeater. The IC-451A incorporates features customers ask for most:

- 3 Memories with Memory Scan
- Programmable Band Scan
- Squelch on SSB/ Silent Receive when no signal is present

- Variable Repeater Split

Imagine programming 2 of your favorite SSB QSO frequencies as well as the OSCAR 8 mode J downlink beacon into memory, and silently scanning these frequencies while working other bands in your shack.

The IC-451A may be ordered from your authorized ICOM Dealer in either 440-439.9999MHz or 440-449.9999MHz models.



GENERAL MARINE AND MARINE COMMUNICATION EQUIPMENT



2113 High St. Bellevue, WA 98004
8334 Riverwood Drive, Dallas, TX 75234



March/April 1982
Volume 3 Number 2

ORBIT Staff

Editor in Chief: V. Riportella, WA2LQQ
Editor: Tony Dorbuck, K1FM
Managing Editor: Bob Myers, W1XT
Advertising Director: Roger Soderman,
WA2NFJ
Associate Editors: Harry Bluestein,
N6TE, Roy O. Hill, W4PID

Editorial Committee

Greg Roberts ZS1BI,* Joe Kasser
G3ZCZ, Harry Yoneda JA1ANG, Alex
Schoening DC7AS, Niko Janssen
PA0DLO, Ross Biggar ZL1WN, Ralf
Hucke CE6EZ, Domenico Marini I8CVS,
John Pronko W6XN, Steve Place,
WB1EYI, Larry Roberts W9MXC, Ron
Broadbent G3AAJ

AMSAT Board of Directors

John Browning W6SP,* Tom Clark
W3IWI, Rich Zwirko K1HTV, Jan King
W3GEY, Pat Gowen G3IOR, Harry
Yoneda JA1ANG, John Henry VE2VQ

*Chairman

AMSAT Officers

President: Tom Clark, W3IWI
Executive Vice President:
Vern Riportella, WA2LQQ
Vice President Engineering:
Jan King, W3GEY
Vice President Operations:
Rich Zwirko, K1HTV
Vice President Special Projects:
Bill Brown K9LF
Office Manager: Martha Saragovitz
Treasurer: Roy Rosner, K4YV

Editorial Office: 850 Sligo Ave.,
Silver Spring, MD 20910.
Telephone: 301 589-6062

Advertising Office: 221 Long Swamp
Road, Wolcott, CT 06716
Telephone: 203 879-1869

AMSAT: P.O. Box 27, Washington, DC
20044.
Telephone: 301 589-6062
Telex: 248-566

Second Class postage paid at Water-
bury, Conn. by ORBIT, 221 Long
Swamp Road, Wolcott, Connecticut
06716.

ORBIT (USPS 041-850) is published six
times per year for \$10. (inseparable
from membership dues of \$16).

Copyright © 1982 by AMSAT. Contents
may be reproduced without specific
permission provided proper credit is
given, unless otherwise stated and
copies are sent both to AMSAT and to
the author. Opinion expressed is not
necessarily that of AMSAT.

CONTENTS:

Technical Features:

4 Utilization of the Phase IIIB Special Service Channels

By Rich Zwirko, K1HTV and Bob Ruedisuel, W4OWA

A plan is described which would provide a sanctuary for special public services. Here's how you may help in the planning of these new services to assure maximum general benefit is derived.

8 A Q&A About Helical Antennas

By Dick Jansson, WD4FAB
AMSAT veteran builder/designer here provides answers to questions you may have in preparing for Phase III. Dick compares several helix designs. Which one will you build?

10. Transatlantic DX on OSCAR 8 Mode J

By John Branegan, GM4IHJ

Stretching Mode J DX to the limit can be fun and challenging as this expert explains.

14 High Eccentricity Orbits Simplified

By Greg Roberts, ZS1BI

An elliptical orbit primer for those who seek a deeper understanding of this oft-baffling topic.

Informational Topics:

18 Fred Works OSCAR

By Joe Kasser, G3ZCZ/4X

Part II of a beginner's series.

21 The New Weather Satellite Handbook: A Book Review

by Noel J. Petit, WB0VGI

22 Soviet Satellite Operations

From AMSAT Satellite Report

24 Product Highlight File: The Microwave Modules MMT-435/28S Transverter

Departments:

3 Ellipsis . . .By Vern Riportella, WA2LQQ

25 AMSAT News

28 Satellite Log

By Geoffrey Falworth

30 Worldwide Satellite Activity

By Pat Gowen, G3IOR

32 Around the World

By Kaz Deskur, K2ZRO

Our Cover: The fourth test launch of the European Space Agency's (ESA) Ariane roars from the pad at Kourou, French Guiana, 19 Dec. 81. LO-4 marked the successful conclusion of the test phase of Ariane and its transition to full operational status beginning with L5. Aboard LO-4 here was Europe's MARECS A Maritime Communications Satellite, a data capsule (CAT) and an electron plasma density experiment provided by a French youth club, Garef-Paris.

LET'S TALK

OSCAR

DATA IS DERIVED FROM OBSERVATIONS BY PROJECT OSCAR REPRODUCTION AUTHORITY. SELF-ADDRESSED STAMPED ENVELOPE OSCAR P.O. BOX 1136 LOS ALTOS, CA 94024 OF THE LATEST AVAILABLE DATA.

SUPPORT THE AMATEUR SATELLITE AMSAT P.O. BOX 27 WASHINGTON, DC 20044
 COMPILED AND COORDINATED BY JOHN PRONKO - W6XN
 RANDY COLE - KN6W AND JACK SOMERS - WA6VGS
 PRINTED BY **Henry Radio**



**AT HENRY RADIO
 WE'RE DEDICATED TO EVERY
 ASPECT OF AMATEUR RADIO**

**...FROM THE EXCITING AND SOPHISTICATED
 TECHNOLOGY OF TODAY TO HELPING THE
 YOUNG NOVICE GET HIS FIRST SIGNAL ON THE AIR.**

**AND OUR OSCAR 8 & 9 ORBITAL DATA
 SHEETS AREN'T ALL WE HAVE TO OFFER**

MON 4 JAN 1982

UTC	LONG	ORBIT
19 25	71.9	19537
202 36	123.5	19539
345 47	175.1	19540
528 58	226.7	19541
712 09	278.2	19542
895 19	329.8	19543
1038 30	381.4	19544
1221 41	433.0	19545
1404 52	484.6	19546
1548 02	536.2	19547
1731 13	587.8	19548
1914 24	639.4	19549
2057 35	691.0	19550
2240 45	742.6	19551

HAM IN SPACE TEE SHIRTS

ORBIT MAGAZINE

L & R POLARIZED ANTENNAS

QSL CARDS

AMSAT BADGES

LINEAR AMPS

**TRANSCIVERS FOR OSCAR
 MODES A, B & J**

RECEIVING PRE-AMPS

ORBIT PLOTTERS

- ICOM
- KENWOOD
- YAesu

ASTRON POWER SUPPLIES

AZMUTH & ELEVATION ROTORS

ORBIT CALENDARS

IN FACT WE HAVE IT ALL...WE ARE OSCAR SPECIALISTS!

HENRY RADIO leads the way. Let us answer your questions and help you with your needs. Give us a call—ask for Jack (WA6VGS)



Henry Radio

2050 S. BUNDY DR.
 LOS ANGELES, CA 90025
 (213) 820-1234

TOLL FREE ORDER NUMBER: (800) 421-6631
 For all states except California.
 Calif. residents please call collect on our regular numbers

Ellipsis...

AN EDITORIAL BY VERN RIPORELLA, WA2LQQ*

Competition for scarce resources has apparently always played a key role in society. The need to secure reliable supplies of tea, nitrates and spices, for example, has driven some men to set sail and others to die on the slopes of the Himalayas. Darwin saw a broader picture. He believed competition to be central to natural selection; virtually evolution's dynamo.

In the amateur radio domain the scarce resource is spectrum. More precisely, the crowding of the available hf and lower vhf spectrum is seriously out of control. This is not news to many. One has merely to witness the cacaphony of 20-meter ssb on a Sunday afternoon to learn all one needs to know about stress in crowds and survival tactics in fierce competition.

What may come as a surprise, however, is the realization that in many regions the vhf spectrum is nearly as saturated. It is against this backdrop that planners of the next generation of amateur radio satellites seek solutions to a classic dilemma.

The dilemma is straightforward; a collision between an immovable object and an irresistible force.

On the one hand we have the immovable object. The present OSCAR user has a sizeable investment in "plant" and "equipment." He is keenly interested in preserving as much of his investment as possible. He thus values highly the continued use of frequencies and modes compatible with his existing equipment suite. Occasionally, the individual's continued access to OSCAR hinges on the preservation of Mode A. For one reason or another he may be unable to acquire Mode B or J capability. To him, higher frequency may mean higher cost and it may mean he is shut out of the newer modes. The hoopla surrounding the new uhf transponders only tends to exacerbate his frustration at being locked into Mode A; an apparently endangered species of bird! Planners explicitly recognize this factor and euphemistically refer to it as the "backward compatibility" factor. They realize that to be acceptable, a new spacecraft should possess a viable component of backward compatibility. Otherwise the instant obsolescence resulting by omitting it would create broad pockets of resentment in the user community.

On the other hand witness the irresistible force. It is the force of progress that says, in effect, "Evolve or perish!" The evolutionary imperative is here professed by an equally adamant community who argues well that we need to keep moving upward in frequency lest the pack of stalking hyenas overcome us all. In somewhat less guarded moments these progressives confess a more

subjective bent for the need to be constantly scouting new turf. Their main joy is not in operating satellites but rather in their creation. Once a spacecraft is flown, it's on to the next plateau. Society at large never really catches up with these fellows.

The planners' dilemma is merely (!?!) to maintain a balance such that all the correct things get done; the entire community functions. That is, the user community should not feel prematurely stampeded to new forage. The progressives must be lightly tethered in their flights of fancy lest they lose sight of the folks who pay the bills; the users. Balance is essential.

How well have the planners responded to the challenge? Have they kept the herd moving yet moderated the sprints of the gazelles up front? It seems an apt question at this juncture now that we are poised for the Phase IIIB launch with its new transponders on 1269 and 436 MHz.

Recall that when AMSAT-OSCAR 7 went aloft there were occasional whimpers from those who could not work Mode B. They wanted more Mode A time. Soon Mode B became the most popular mode ever; so popular that it was jammed most of the time. People adapted and joined the fun on B after a time. Then came AMSAT-OSCAR 8 with its "silly" Mode J. A lot of bellyaching and carping was heard until folks found out how much could really be done with this fine mode once they knew what to expect and how to get the most from it. Recently Mode J has shown signs of becoming the most popular mode yet since it yields many of the merits of B but without the crowding. Again many of the Mode A folks, when they managed the transition, not only found something to like in the new mode, but became staunch defenders of their newly discovered turf.

Phase IIIB will be the first transponder-equipped OSCAR to fly which has not included a 10 meter downlink. Does this mean, as some suggest, that AMSAT will be severing the beginners' access route? Obviously the question presumes that 10-meter equipment is the key. We don't agree. Vhf and uhf equipment abounds in many nations today and is becoming available in the others. So although the question would have been answered quite differently a decade ago, today the beginners' access route might just as well be 2 meters or above. Furthermore, there is ample reason to conclude there are more Mode A birds in the RS roost to serve the firmly immobile Mode A community. This is

(Continued on page 17)

Utilization of the Phase IIIB Special Service Channels

By Rich Zwirko,* K1HTV and Bob Ruedisueli,** W4OWA

The SSC concept is explained and you're invited to help define future uses for these new resources.

Here is an opportunity to contribute your experience to the Phase IIIB planning process. Your comments concerning the material presented here will assist AMSAT planners with the task of providing a spacecraft optimized to serve the best interests of the world community of radio amateurs.

You may recall that the Phase IIIA transponder passband was wide enough to support three 4 kHz wide channels at each edge in addition to the 124 kHz passband available for general use. (See Phase IIIA Bandplan, *ORBIT* #1, March 1980.) These channels were designated as Special Service Channels (SSCs L1, L2, L3 & H1, H2, H3). Phase IIIA planning included rather rigid specifications for the utilization of these six SSCs. Since then, further discussions and incoming comments concerning the Phase IIIA SSCs from future users has prompted rethinking the use of the comparable portions of the Phase IIIB transponder passband.

Objections to Phase IIIA SSC Plan

Concern was expressed that some of the six SSCs would lie idle a good portion of the time, thus wasting much of the otherwise usable passband. Some AMSAT members felt that the SSCs were not needed at all! Others felt that the "controls" placed upon the use of the SSCs were too structured and perhaps seemed to be a bit dictatorial. International users felt that the SSC plan favored U.S. hams and were of little value to interests elsewhere. Some users took exception to placing so much emphasis on the value of the SSCs to schools, colleges, etc. Still others agreed that some control over the SSCs was necessary.

Apart from the obvious educational and operational value, one of the key arguments for the SSCs originally concerned the fact that users tend to stay away from the transponder's band edges so, why not put this unused spectra to good use? The SSCs seemed a viable answer to this question.

It would appear that the original Phase III SSC concept left much to be desired in the eyes of many. Phase IIIB presents us with a new opportunity to better plan Special Service Channel utilization.

Proposed Phase IIIB SSC Utilization

These are our proposed views as they exist currently. They are not final. There is still time to make changes. Further discussion and comments are needed to assure an equitable plan. Flexibility is uppermost in our minds during this planning phase. The SSCs must be arranged so as to allow maximum utilization of the available bandpass while providing as many options as possible.

As in Phase IIIA, the Special Service Channels will be placed at each passband edge. At least initially, however, only four channels are being considered: two at the high end and two at the low end. Unlike the SSCs for Phase IIIA the proposed IIIB SSCs would each be 5 kHz wide. In fact, if the need should arise, the two upper channels (H1 and H2) could be combined to provide a single 10 kHz wide channel. Likewise, the two lower channels could be combined to provide a single wide band channel that would support high speed data transmission.

The upper channels (H1, H2) would be utilized for voice transmission while the lower channels (L1, L2)